


12x M12x1.75-6g $\nabla .75$ [MM.M]
 EQ. SP. ON
 A $\phi 15.551$ [395.0] B.C.
 BOTH SIDES

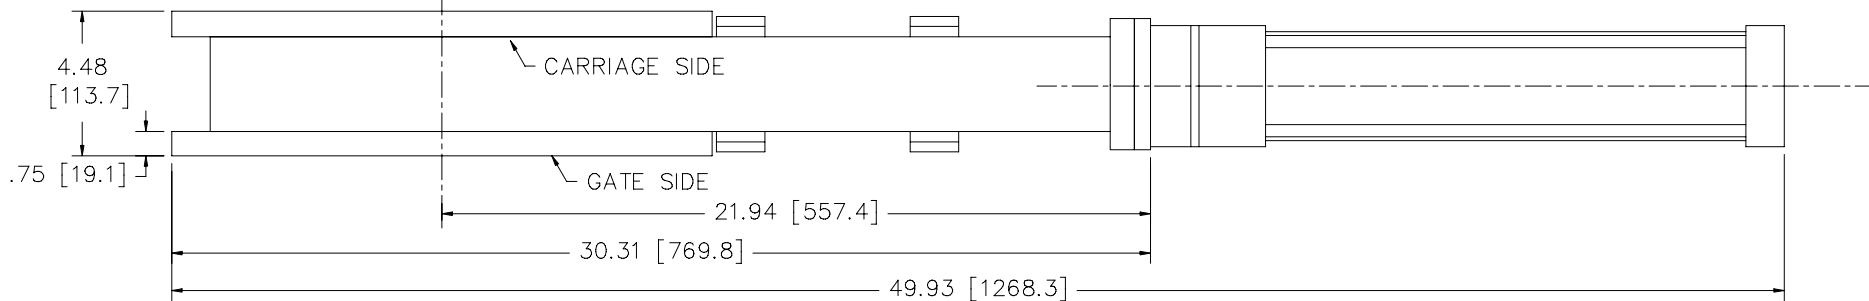

1. DIMENSIONS IN BRACKETS [] ARE MILLIMETERS.

VALVE OPTIONS

MATERIAL	FINISH	SOLENOID VOLTAGE
STAINLESS STEEL	#4 POLISH	120V AC
	E-POLISH	24V DC
MILD STEEL	BEAD BLAST	220V AC

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES ARE:
 DECIMALS ANGLES FINISH
 .XX ± .06 ± 1° ✓
 .XXX ±
 UNSPECIFIED FILLETS: R.015
 BREAK EDGES: 010 ± .001
 REMOVE ALL BURRS
 THIRD ANGLE PROJECTION
 DO NOT SCALE DRAWING

OUTLINE DWG
 ISO 320 GATE VALVE
GNB Corporation
 SCIENTIFIC AND INDUSTRIAL EQUIPMENT
 3200 Dwight Rd. Suite 100
 Elk Grove, CALIFORNIA 95758
 (916) 395-3003 FAX: (916) 395-3363
 www.gnbvalves.com